
Technisches Datenblatt

Technical data sheet

Starke Verbindung
Kluge Technik
Strong contacts
Clever technology



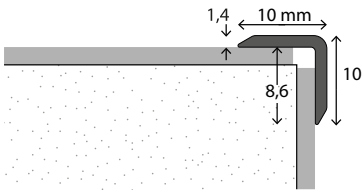

Winkelprofil
Nr. 344, 10 x 10 mm

- Aluminium.
- Ungelocht.

Werkstoff:	EN AW 6063 (DIN EN 573)
Werkstoffzustand:	T6 (DIN EN 755-2)
Vorbehandlung:	E6 (DIN EN 17 611)
Schichtdicke Eloxal:	Klasse 15 (DIN EN 17 611)

Geeignet für: Wandpaneele, Designbelag / LVT Dryback
Montageart: Kleben

**Winkelprofile sind ideal geeignet als kleiner Treppenwinkel, als Türschwellenprofil oder als Abschluss an Podesten.
Sie schützen die Kanten des Bodenbelags dauerhaft.**

Angle edge
no. 344, 10 x 10 mm

- Aluminium.
- Without screw holes.

Material:	EN AW 6063 (DIN EN 573)
Material condition:	T6 (DIN EN 755-2)
Pre-treatment:	E6 (DIN EN 17 611)
Thickness of anodised layer:	Class 15 (DIN EN 17 611)

Suitable for: Wall panels, Design flooring / LVT dryback
Installation: gluing

**Angle edges are ideally suited as a small staircase angle, as a door threshold profile or as a termination on platforms.
They protect the edges of the flooring permanently.**

Carl Prinz GmbH & Co. KG
von-Monschaw-Str. 5, D-47574 Goch
www.carlprinz.de

Mit Erscheinen dieses Dokuments verlieren alle Vorgängerversionen ihre Gültigkeit.
With publication of this document all former versions are invalid.