

Technisches Datenblatt

Technical data sheet

Starke Verbindung
Kluge Technik
Strong contacts
Clever technology

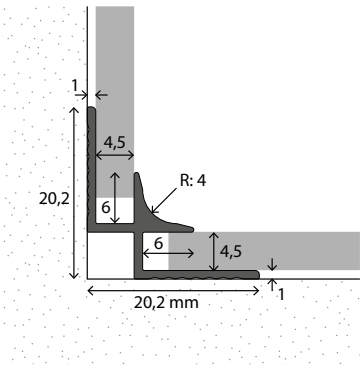

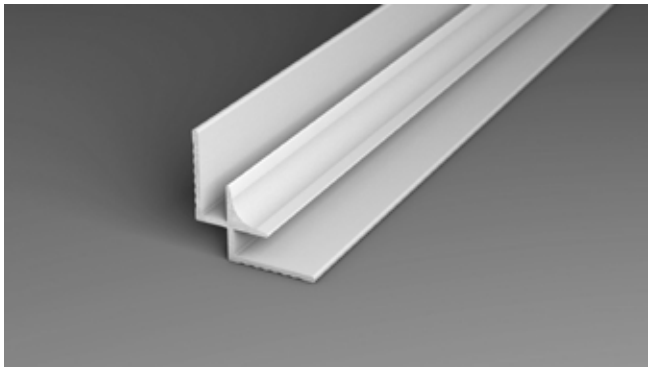

Innenwinkel
Nr. 953, 20,2 x 20,2 mm

- Aluminium, ungelocht.
- Für Wandpaneele bis 4,5 mm Stärke.

Werkstoff:	EN AW 6063 (DIN EN 573)
Werkstoffzustand:	T6 (DIN EN 755-2)
Vorbehandlung:	E6 (DIN EN 17 611)
Schichtdicke Eloxal:	Klasse 15 (DIN EN 17 611)
Pulverbeschichtung:	optional (RAL-Farbtöne)

Geeignet für: Designbelag / LVT Click und Loose Lay, Designbelag / LVT Dryback
Montageart: Kleben

Profile für Wandpaneele - Fugenlose Feuchträume und die Renovierung mit Wandpaneelen erfreuen sich großer Beliebtheit. Im Nu lassen sich alte Bäder mit großflächigen Elementen in hochwertiger Stein-, Holz- oder Glasoptik modernisieren, ohne dass die vorhandenen Wandbeläge entfernt werden müssen.
Die Paneele können mit wenigen Handgriffen binnen kürzester Zeit verarbeitet werden, wenn das entsprechende Zubehör in Form von Abschluss- und Verbindungsprofilen, Außen- und Innenwinkeln zur Verfügung steht.
Das Prinz-Programm für die Verarbeitung von Paneelen bis zu 4,5 mm Stärke umfasst ein breites Programm an Profillösungen in silber eloxiert oder pulverbeschichtet in schwarz und weiß.

Inner angle
no. 953, 20.2 x 20.2 mm

- Aluminium, unperforated.
- For wall panel thicknesses up to 4.5 mm

Material:	EN AW 6063 (DIN EN 573)
Material condition:	T6 (DIN EN 755-2)
Pre-treatment:	E6 (DIN EN 17 611)
Thickness of anodised layer:	Class 15 (DIN EN 17 611)
Powdercoating:	optional (RAL-hues)

Suitable for: Design flooring / LVT click and loose lay, Design flooring / LVT dryback
Installation: gluing

Profiles for wall panels - Seamless wet rooms and renovations with wall panels are very popular. In no time at all, old bathrooms can be modernised with large elements in a high-quality stone, wood or glass look without having to remove the existing wall coverings. The panels can be applied in a few simple steps within a very short time, if the appropriate accessories are available such as end and connection profiles, outer and inner angles.
The Prinz programme for processing panels up to 4.5 mm thick includes a wide range of profile solutions in silver anodised or powdercoated in black and white.

Carl Prinz GmbH & Co. KG
von-Monschaw-Str. 5, D-47574 Goch
www.carlprinz.de

Mit Erscheinen dieses Dokuments verlieren alle Vorgängerversionen ihre Gültigkeit.
With publication of this document all former versions are invalid.